

BdVgUfI SdS' Rk

>f VsdBal Vd
I SdS' Rk

3' - gS^6WdSVStja
A nHk%
Ah % -

 MEMBER

66HL4M-(V) 610-635 Watt

Mechanical Characteristics

5W*FkbW	@ žrkbW? a` a žJkefS^f W
@ažaxUW*e	#%\$/((° \$fi
6[W e[a` e	\$%\$° ##%&° % _ _
I WYZf	\$*ž\$]Y
8d` f 9`See	%ž\$ _ ! 3` f[ždW VUW[a` 5aSf[YI : [YZ FdS` e_ [ee[a` t >ai :d` t FV_ bWVW 9`See
8dS_ W	3` aV[! VV 3`g_ [[g_ 3`ak
<g` Uf[a` 4aj	:B(* DSRVW
BdchVUW[a` 5`See	5`See;;
:75 8[dWfkbW	5`See 5
5a` ` VUWadFkbW	<=" %ž !? 5&! AfZVde
Agfbgf 5ST Wž	&Z` _ _ `s /Efj &" _ _ t/žj \$" _ _ ad5gefa_ [! W >W YfZ

Packaging Configuration

BS^W 6[W e[a` e	\$%(° ##`° #S` # _ _
BSU[[Y VWS[^ /Fi a bS^W e/A` WefSU] fi	%# bUe! bS^W e[(\$ bUe! efSU] t (S` bUe! &" r: C 5a` fS[W


Specifications (STC)

? S[[g_ Bai Wd B_ Sj M bO	(#` (#` (\$` (\$` (%` (%`
? S[[g_ Bai Wd Ha` fSYW H_ b MIO	&` ž (&` ž) % &` ž+` &#` ž` &#` ž% &#` ž/+
? S[[g_ Bai Wd 5gdW f ;_ b MIO	#` ž & #` ž#` #` ž#` #` ž\$ #` ž\$* #` ž/&
A bW ž[dJg[f Ha` fSYW HaU MIO	&* ž% &* ž) + &` ž+` &+` ž#` &+` ž\$ &+` ž%&
E Z ad ž[dJg[f 5gdW f :eU MIO	#(ž # #(ž * #(ž#` #(ž\$ #(ž\$+ #(ž/)
? aVg W7 U[W Uk EF5 M O	\$ž\$ * \$žž) \$žž+` \$ž#& \$žž/\$ \$žž/ #
Bai Wd Fa` WdS` UW	" p t %.
FV_ bWdSfgdW5aW U[W feaXB_ Sj	ž ž\$, !, 5
FV_ bWdSfgdW5aW U[W feaXHaU	ž ž\$, !, 5
FV_ bWdSfgdW5aW U[W feaXeU	" ž & , !, 5

Application Conditions

A bWdSf[Y FV_ bWdSfgdW	ž & , 5 p t) , 5
? S[[g_ EkefW_ Ha` fSYW	#` " " !#` " " H65 /;75fi
? S[[g_ EVW 8geWdSf[Y	% 3


Engineering Drawings

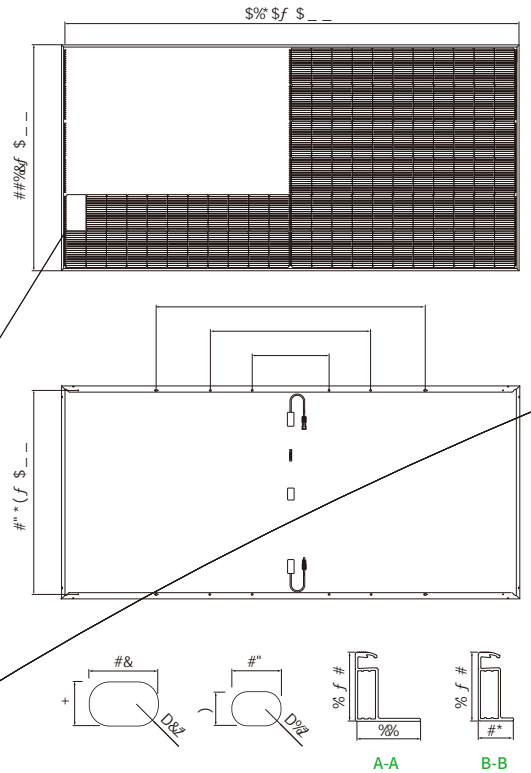

f!@afW 8adebWU[UV_ W e[a` eS` V fa` WdS` UWdS` YWd b` Wd eW
d/W dfa fZVUdtd/mba` V[Y VWS[VW_ aVg` WdSi [Yez

Electrical Performance

Power-Voltage Curves (66HL4M- V 615W)

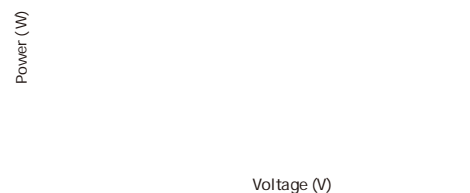

Current-Voltage Curves (66HL4M-(V) 615W)

